

335/462.450 20_

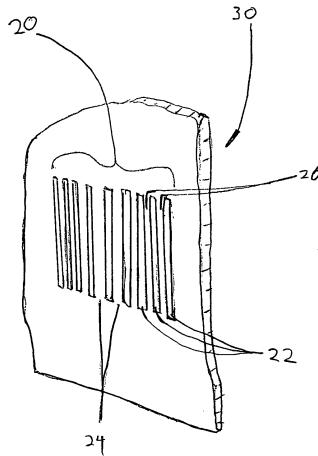

F16. 1

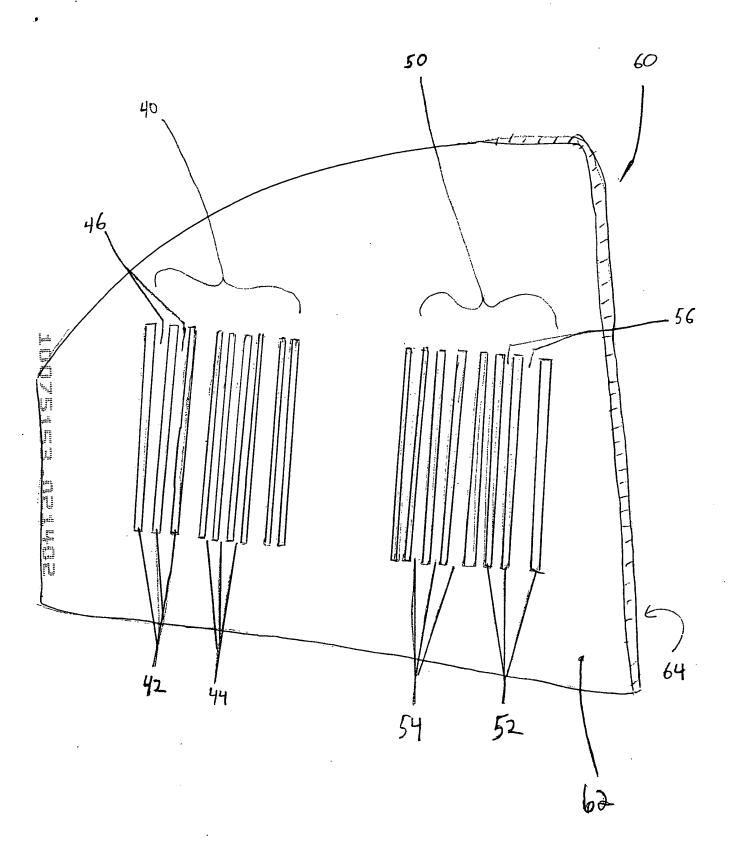

F16. 2

THE ENTRY EN

F16.3

FIG. 4

← TOP EDGE

Daser Aperture

LASER BEAM PATH (@ 90° ABOVE BARCODE)



"Human Readable Data" _____ "Top" Side

BARCODE

*Note: H = Barcode Label surface to Laser Aperture Surface

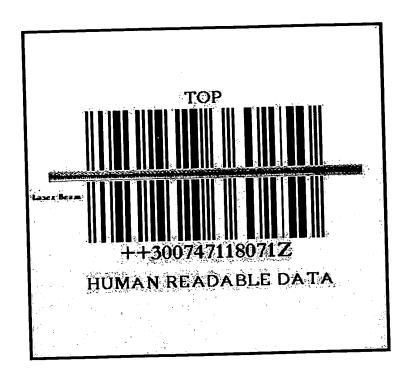


FIGURE 5